




Fused Connectors

900 Si/ 1

Screw-screwless-Terminal Block, 1 pole, Voltage Rating: 400 V, Current Rating: 6.3 A

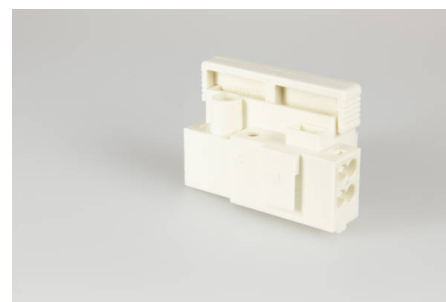

Order Info

Reference Number (ref. no.)	175001
Applications	Lighting, Electrical Appliances
PU	100
EAN	4028012108077

Type

Type	Screw-screwless-Terminal Block
Number of poles	1 pole
Clamping Units per Pole	1/4
Colour	white
Connection Type	Screw-screwless

Technical Data

Voltage Rating	400 V
Current Rating	6.3 A
Insulating Material	PA 6.6
Contact Material	Brass
Flammability Rating	V-2
max. Ambient Temperature Operation	70 °C
Assembly Contact Screw	0.8x4 / \varnothing 0.5 Nm
Internal Core Cross-Section max.	1.5 mm ²
External Core Cross-Section min.	0.5 mm ²
External Core Cross-Section max.	4 mm ²
Internal Stripping Length	7-7.5 mm
External Stripping Length	8-8.5 mm
Fixing	Catch Pin
Internal Core Cross-Section min.	0.5 mm ²
Type of Conductor Solid External	yes
Type of Conductor Flexible External	yes
Type of Conductor Stranded External	yes
Type of Conductor Solid Internal	yes